


PREPUST


“ALFA”

100x80L230



A-A

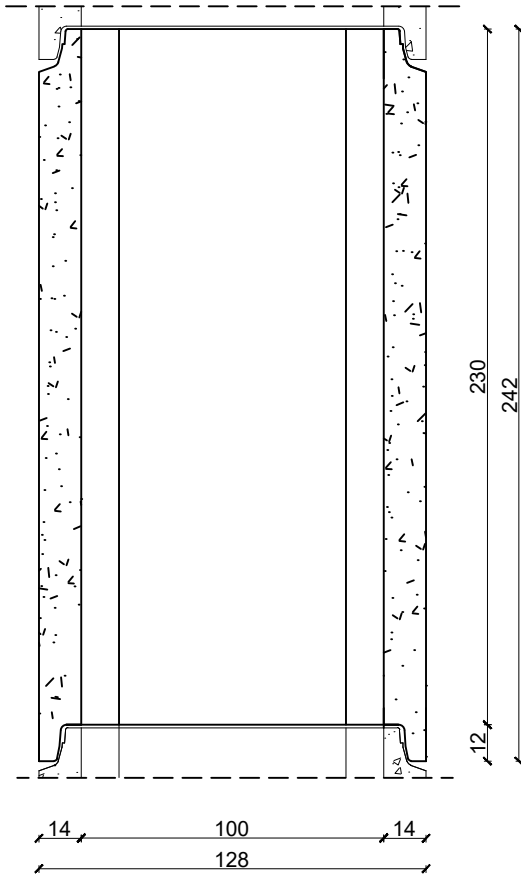

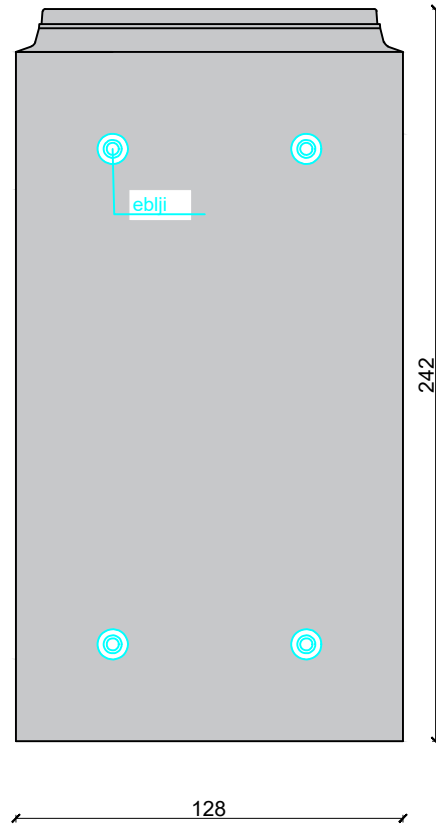


DVIG ELEMENTA:

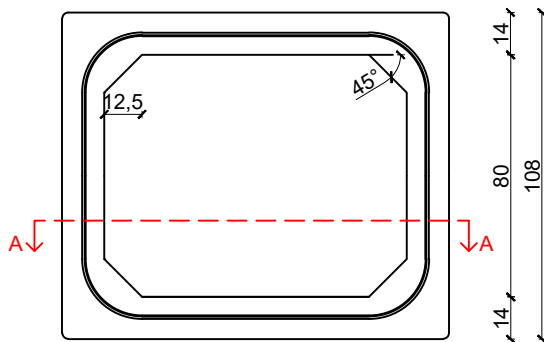

DETAIL SPOJA



	UNI EN ISO 9001:2015	1. TEŽA ELEMENTA	3500 KG
	Nr. 50 100 9341 Rev.006	2. BETON	C 40/50
	EN 14844:2006+A2:2011	3. ODPORNOST	Rck=50 N/mm ² ; fck=41 N/mm ²
	Nr.0948 - CPR - 0077 Rev. 4	4. ARMATURA	B450A(φ 6mm); B450C(>φ6mm)
		5. ODPORNOST ARM.	ftk=540 N/mm ² ; fyk=450 N/mm ²
	UNI/PdR 88:2020	6. MEHANSKA ODPORNOST	Mf zgornje plošče = 13,2 KNm/m
	TUVIT-LMR-A0092	7. KOEFICIENT VARNOSTI	c=1,5; s= 1,15
		8. ODPORNOST BETONA	XC4