

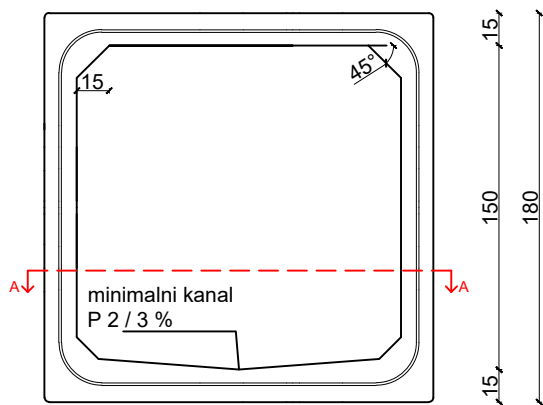
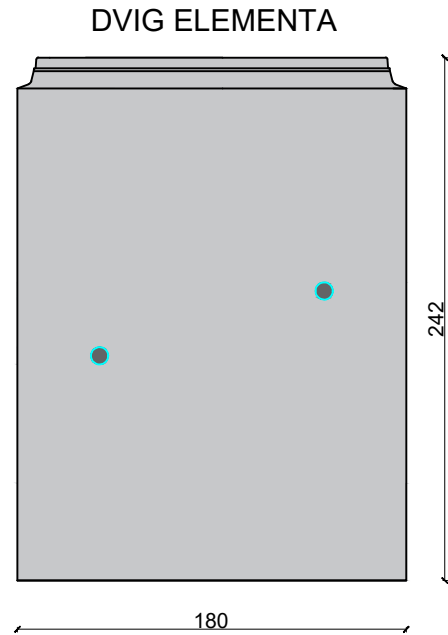


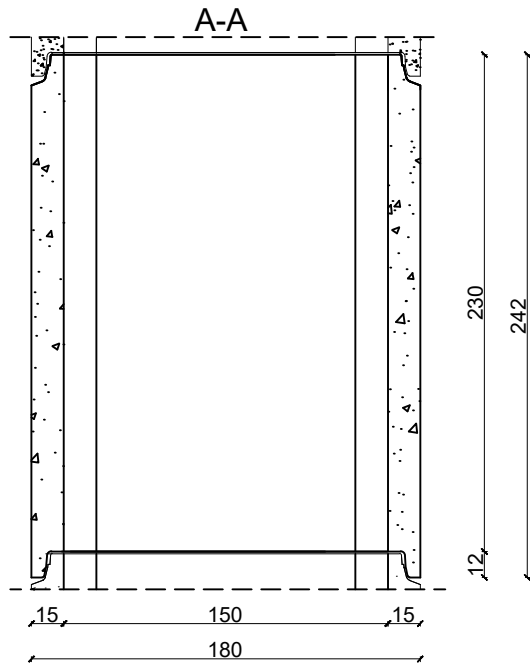


PREPUST

“QUADRO” 150x150L230



DETAIL SPOJA



| | | | |
|--|--|--|---|
|  | UNI EN ISO 9001:2015 Nr. 50 100 9341 Rev.006 | 1. TEŽA ELEMENTA | 6000 KG |
| |  | EN 14844:2006+A2:2011 Nr.0948 - CPR - 0077 Rev. 4 | 2. BETON |
| 3. ODPORNOST | | | $R_{ck}=50 \text{ N/mm}^2$; $f_{ck}=41 \text{ N/mm}^2$ |
| 4. ARMATURA | | | B450A(φ 6mm); B450C(> φ 6mm) |
|  | UNI/PdR 88:2020 TUVIT-LMR-A0092 | 5. ODPORNOST ARM. | $f_{tk}=540 \text{ N/mm}^2$; $f_{yk}=450 \text{ N/mm}^2$ |
| | | 6. MEHANSKA ODPORNOST | Mf zgornje plošče = 18,5 KNm/m |
| | | 7. KOEFICIENT VARNOSTI | c=1,5; s= 1,15 |
| | | 8. ODPORNOST BETONA | XC4 |